(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

### (19) World Intellectual Property Organization International Bureau



# 1 10010 KINGGAN 10010 UDA 6000 KENARUKAN 11 UD 6000 KUNARUKAN 11 UD 6000 KUNARUKAN 6000 KUNARUKAN 600 KUNARUKA

#### (43) International Publication Date 1 April 2004 (01.04.2004)

# **PCT**

## (10) International Publication Number WO 2004/026212 A1

(51) International Patent Classification7:

A61G 7/10

(21) International Application Number:

PCT/DK2003/000601

(22) International Filing Date:

18 September 2003 (18.09.2003)

(25) Filing Language:


English

(26) Publication Language:

English

- (30) Priority Data: DK 20 September 2002 (20.09.2002) PA 2002 01387
- (71) Applicant (for all designated States except US): H.C. EQUIPMENT APS [DK/DK]; Gørtlervej 9B, DK-9000 Aalborg (DK).

- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GII, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

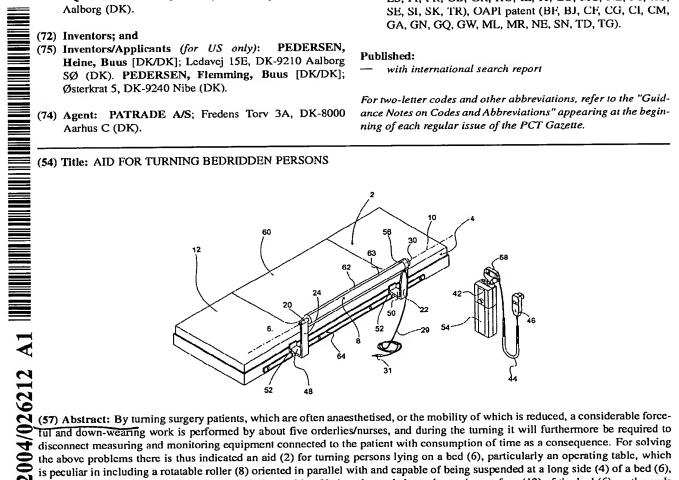

the above problems there is thus indicated an aid (2) for turning persons lying on a bed (6), particularly an operating table, which is peculiar in including a rotatable roller (8) oriented in parallel with and capable of being suspended at a long side (4) of a bed (6), where the rotational axis (10) of the roller (8) is capable of being elevated above the resting surface (12) of the bed (6), as the ends (14,16) of the roller (8) are suspended at free ends (18,20) of, upright brackets (22,24) releasably attached at the long side (4) of the bed. Hereby, one orderly/nurse is made redundant, and furthermore it will not be necessary during the turning to disconnect and reconnect possible apparatuses connected to the patient.

